

## KEEP SAFETY AT THE CENTER

Converting your articulated hauler from a dump body to an ejector body allows you to safely eject loaded material in areas with reduced overhead clearance or uneven surfaces.






### **BOLT TOGETHER & BOLT ON**

The K-Tec EJB's patent-pending, bolt-together design also makes for affordable overseas shipments and ease of repair. The flexible bolt-on design can be installed on new or used machines without any modifications, which are required for competing solutions. This unique design increases versatility as it allows easy changes between ejector body, regular dump body, and scraper application.

# TAILOR MADE FOR VOLVO ARTICULATED HAULERS

The EJB4X was engineered in close collaboration between K-Tec and Volvo. K-Tec's years of earthmoving equipment manufacturing experience combined with Volvo's pioneering conceptual knowledge create the perfect ejector body solution made specifically for Volvo Articulated Haulers.



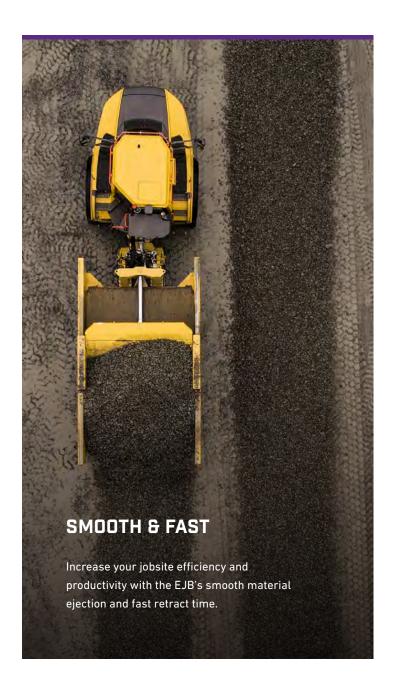

SPECIFICATIONS	IMPERIAL	METRIC
Heaped Capacity (ISO)	43 sh tn / 30.5 yd³	39 Tonnes / 23.3 m³
Max Load Rating	86,421 lb	39,200 kg
Telescopic Cylinder Dimensions	14' 9" Stroke	4.48 m Stroke
Eject Time Loaded	12-14 Seconds	12-14 Seconds
Retract Time Empty	12-14 Seconds	12-14 Seconds
Mudflaps	Standard	Standard
Bolt-Together Design	Standard	Standard

TRANSPORT DIMENSIONS	IMPERIAL	METRIC
Overall Width	135.6"	3.45 m
Overall Length (incl. Spill Guard)	246.8"	6.27 m
Overall Height (incl. Spill Guard)	89.5"	2.27 m
Overall Weight	14,751 lb	6,691 kg

### **FEATURES**











FAST EJECT / RETRACT



TOP LOAD



BOLT TOGETHER DESIGN



CONTAINER SHIPPING



1 YEAR STRUCTURAL 6 MONTHS PARTS & LABOR WARRANTY





CERTIFIED

CERTIFIED

## **DOM Distribution**

+61 7 4662 3511 Phone +1800 773 263 Toll Free

### **ADDRESS**

37 Winton St W, Dalby 4405, Queensland, Australia

### **EMAIL**

sales@domdistribution.com.au

DOMDISTRIBUTION.COM.AU

